




www.atsequipment.com

DC ELECTRIC 32' SCISSOR LIFT

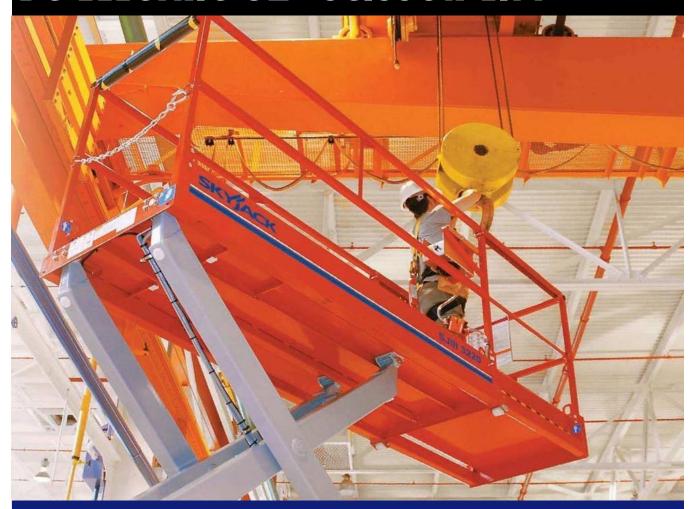

Conventional Series

DC ELECTRIC Scissor Lifts

The conventional Series DC Electric Scissor Lifts offer high capacity and large platform areas, making them suitable for any on-slab application. Featuring variable speed rear wheel hydraulic drive, the Conventional Series offers working heights up to 38', and 25% gradeability.

A standard 4' roll out extension deck can be secured in multiple positions, and can be driven at full height. Consistent with Skyjack's robust and reliable design features, the Conventional Series DC Electric Scissor Lifts utilize Skyjack's standard color coded and numbered wiring system with analog based controls.

ATS EQUIPMENT INC.


Construction Equipment & Supplies

Rentals • Sales • Service

BOSTON, MA (617) 825-3600 AUBURN, MA (508) 832-8500 REHOBOTH, MA (508) 379-6200 CANDIA, NH (603) 483-2100

DC ELECTRIC SCISSOR LIFTS

SPECIFICATIONS	SJIII 4632
A) Work Height	38'
B) Raised Platform Height	32'
C) Lowered Platform Height	48.5"
D) Overall Width	46"
E) Overall Length	91"
F) Stowed Height (Rails Up)	88"
G) Stowed Height (Rails Down)	74"
H) Platform width (Inside Dimension)	42"
I) Platform Length (Inside Dimension)	84"
Extension Deck (Roll Out)	4'
Ground Clearance (Stowed)	3.5"
Ground Clearance (Raised)	.75"
Wheelbase	69"
Weight	5,075 lbs
Gradeability	25%
Turning Radius (Inside)	47.5"
Turning Radius (Outside)	93.5"
Lift Time (With Rated Load)	59 sec
Drive Speed (Stowed)	2 mph
Drive Speed (Raised)	0.6 mph
Maximum Drive Height	Full Height
Capacity (Overall)	700 lbs
Maximum # of Persons	2





STANDARD FEATURES

- Drivable at full height
- Variable speed, rear two wheel hydraulic drive
- Dual holding brakes
- Proportional controls for drive & lift functions
- 4' roll out extension deck
- 24v DC power source
- Low voltage battery protection
- Analog control system
- Color coded and numbered wiring system
- 25% gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC outlet on platform with GFI
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Operator horn
- Hinged railing system
- Lanyard attachment points
- Forklift pockets and tie down/lift lugs

