

#### ATS Equipment, Inc. located in four convenient locations.

Boston, MA Auburn, MA Rehoboth, MA Candia, NH 33 Locust Street487 Washington Street51 Fall River Avenue133 Raymond Road

Tel: (617) 825-3600 Tel: (508) 832-8500 Tel: (508) 379-6200 Tel: (603) 483-2100



# NEW COMPACT DESIGN

#### **FEATURES**

•2-700FT HOSES (Made up of 1-700FT, 1-500FT &1-200FT) •THAW UP TO 2,800 FT2 •CURE UP TO 5,600 FT2 •TEMPORARY HEAT UP TO 6,200 FT2 •NEW COMPACT DESIGN (124"X72"X70") •50+ HRS RUN TIME •LIFTING HOOKS & FORKLIFT POCKETS (STANDARD) •POWERED REEL WITH FREEWHEEL FEATURE •ON BOARD AIR COMPRESSOR FOR EVACUATING HOSES






## DOUBLE LOOP TECHNOLOGY

By using shorter hoses, more fluid, and higher efficiency pumps with increased flow, the Heat King provides more consistent temperature to the field for better concrete curing and ground thawing results.



## **HEAT KING ADVANTAGE**

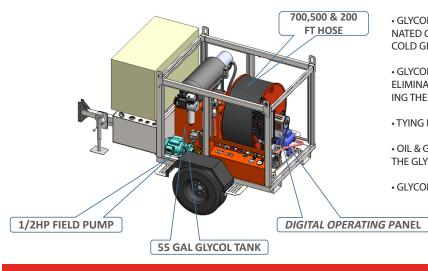

• GLYCOL GETS UP TO OPERATING TEMPERATURE FASTER THAN COMPETITORS (DESIG-NATED CIRCULATION PUMP PULLS FROM THE RESERVOIR AND DOESN'T HAVE TO PUSH COLD GLYCOL THROUGH THE FIELD HOSES)

• GLYCOL CAN BE BLOWN OUT OF THE FIELD HOSES AND STORED IN THE RESERVOIR, ELIMINATING THE NEED TO STORE IT IN A CONTAINER. CONVENIENT WHEN ABANDON-ING THE HOSES IN CONCRETE OR FOR SPACE HEATING SET-UPS & TAKE DOWNS

• TYING INTO EXISTING MANIFOLDS SUCH AS IN-FLOOR HEATING

• OIL & GAS APPLICATIONS SUCH AS TANK HEATING & HAVING THE ABILITY TO RETRIEVE THE GLYCOL FROM STEAM COILS

GLYCOL CAN BE LEFT IN THE FIELD HOSES OR THE RESERVOIR

**HK150 SPECIFICATIONS** 1-700 ft, 1-500ft, 1-200ft (5/8" Hose) Interior Lights Standard for ease of night operation Unspool with one person Mud Tray Added under the reel to catch mud debris Supply Manifold 2 - 1/2" quick connect & 1-1" quick connect • Heater Capacity Diesel 150,000 BTU/H Heating Fuel Input Return Manifold 2 - 1/2" quick connect & 1 -1" quick connect Glycol Tank 55 US GAL • Ground Thawing Capacity 2,800 ft<sup>2</sup> Electrical Requirements 1 - 120V AC 20A Circuits Concrete Curing Capacity 5.600 ft<sup>2</sup> • Generator (Optional) 1 - 7 kw or 1- 6 kw MQ • Temporary Heating Capacity 6,200 ft<sup>2</sup> (Varies with R-Value) Axle 1 - 4400lbs Leaf Springs, Electric Brakes • Field Pump 1/2 Hp Centrifugal Hitch 2 5/16" Ball (Pintle also available) Circulating Pump 1/2 Hp Centrifugal Dimensions 124"x72"x70" 70 US GAL • Weight (Fuel Empty/Full) Fuel Tank 3,204 lbs / 3,703 lbs • Run Time 50+ Hours • Larger Wheels Higher capacity & better towing Flo Indicator Ensures proper operation



Hose

Hose

#### ATS Equipment, Inc. located in four convenient locations.

**Boston**, MA Auburn, MA **Rehoboth**, MA Candia, NH

**33 Locust Street 487 Washington Street 51 Fall River Avenue 133 Raymond Road** 

Tel: (617) 825-3600 Tel: (508) 832-8500 Tel: (508) 379-6200 Tel: (603) 483-2100