



TD6-300 GAS DIAPHRAM PUMP



**AVAILABLE FOR
RENT OR SALE**



www.atsequipment.com

POWERED BY QUALITY, DEPENDABLE HONDA GAS ENGINES

Capable of continuous dry operation for seepage dewatering. Handles sand, mud and sludge.

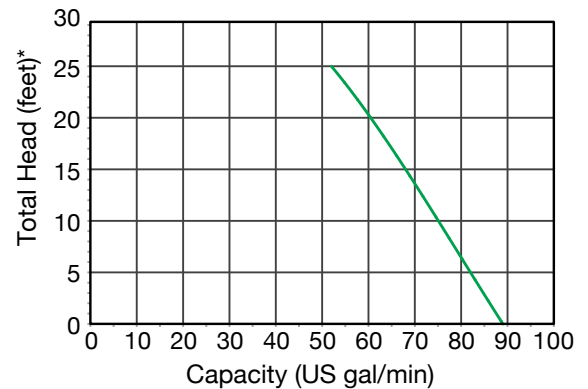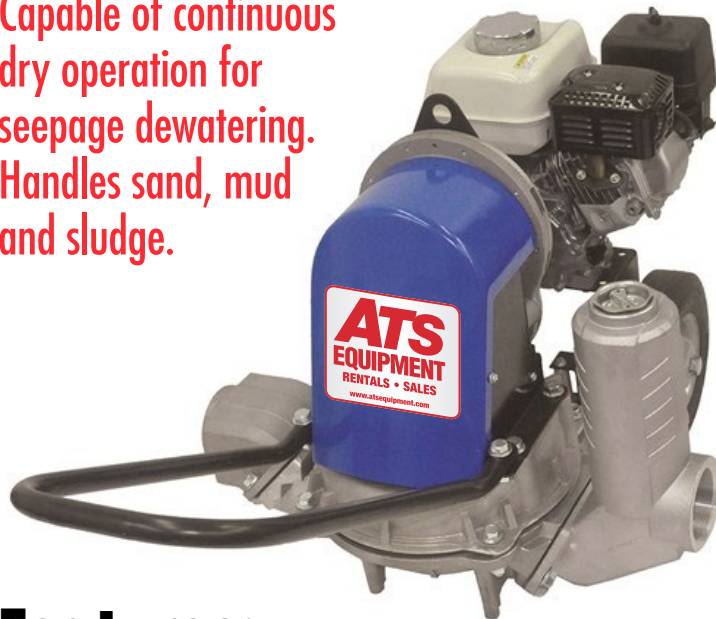

(* Convert to psi, divide by 2.31 Liquid - Water specific gravity 1.0)

Features:

- Sand cast aluminum construction for portability and durability
- Thermoplastic rubber diaphragm
- 3-inch NPT suction and discharge size
- 1-5/8 inch diameter solids handling capability
- Modular component design permits easy maintenance and cleanout
- Engine driven model: Honda GX120
- Delivers up to 90GPM
- Maximum temperature 180°F

Technical Specifications

Suction Size:	3" NPT Coupling
Engine:	Honda GX120
Max Output (hp/rpm):	4.0/3600
Dimension (L x W x H):	43 x 26 x 23
Pump Weight:	175 lbs

PUMP

Gallons Per Minute	85 Gallons
Inlet Diameter	3"
Outlet Diameter	3"
Pump Head Material	Aluminum
Housing Material	Aluminum
Solids Handling Size	1.625 inch
Handles Solids	Yes
Suction Head	20 Feet
Total Head Lift	25 Feet
Discharge Port Size	3 Inch
Built-in check Valve	Yes
Submersible	No

ENGINE

Engine Brand	Honda GX
Starting System	Recoil Start
Engine Cycles	4-Cycle
Low Oil Shutdown	Yes
CC	118 cc
Fuel Tank Size	.52 Gallons
Run Time	2 Hours

OVERVIEW

Weight	175 Pounds
Consumer Warranty	2 Years
Commercial Warranty	2 Years
Product Length	43.4 Inches
Product Width	26.4 Inches
Product Height	23.4 Inches

ATS EQUIPMENT INC. Construction Equipment & Supplies Rentals • Sales • Service

BOSTON, MA
(617) 825-3600

AUBURN, MA
(508) 832-8500

REHOBOTH, MA
(508) 379-6200

CANDIA, NH
(603) 483-2100