



LB-480-62

AVAILABLE FOR SALE



www.atsequipment.com

POWERFUL PUMPS BUILT WITH DURABLE MATERIALS IN AN EASY HANDLING DESIGN.

Top discharge provides maximum motor cooling efficiency allowing continuous duty operation at low water levels and extended dry-run capability



FEATURES

- Urethane, Semi Vortex Impeller and Wear Plates for maximum durability and maintaining pump performance.
- Double Inside Mechanical Seal With SiC faces provides the longest operational life.
- Oil Lifter provides lubrication of the seal faces. (patent pending)
- V-Ring Seal design protects mechanical seal from abrasive particles

OPTIONAL ACCESSORIES

- TS-301 Float Switch for automatic operation



ATS EQUIPMENT INC. CONSTRUCTION EQUIPMENT & SUPPLIES RENTALS-SALES-SERVICE

**BOSTON, MA
(617) 825-3600**


**AUBURN, MA
(508) 832-8500**

**REHOBOTH, MA
(508) 379-6200**

**CANDIA, NH
(603) 483-2100**



Performance Range

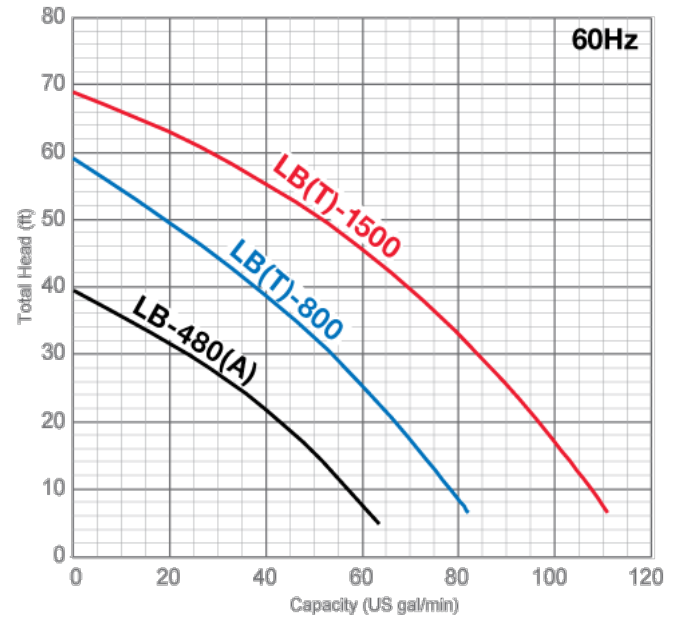

Model	LB-480-62
Max. Capacity (GPM)	62.4
Max. Head (ft)	39.5
Discharge Connection (in)	2"
Motor Output	2/3 hp
Voltage (V)	110V
Amperage – rated current	6.1
Amperage – starting current	12.5
Std. Cable length (ft)	32'
Max. Cable Length (ft)	62'
Min. Generator Capacity (watts)	1300
Max. Diameter (in.)	7 3/8
Max. Height (in.)	11 3/16
Continuous Running water level (in.)	2"
Pump Weight	28 lbs

Multi-directional discharge connector



Float Switch Range

Tether length	Pumping range
3.5 (in)	7 (in)
6 (in)	10 (in)
10 (in)	16 (in)
14 (in)	22 (in)
18 (in)	28 (in)
22 (in)	33 (in)
24 (in)	36 (in)

Note: Due to weight of cable, pumping range above horizontal is NOT equal to pumping range below horizontal. As tether length increases, so does the variance of the pumping range. Pumping ranges are based on testing in non-turbulent conditions. Actual conditions may vary.